


Feux à LED, 230V / AC, Ø210 mm

Artikelnummer M40360301

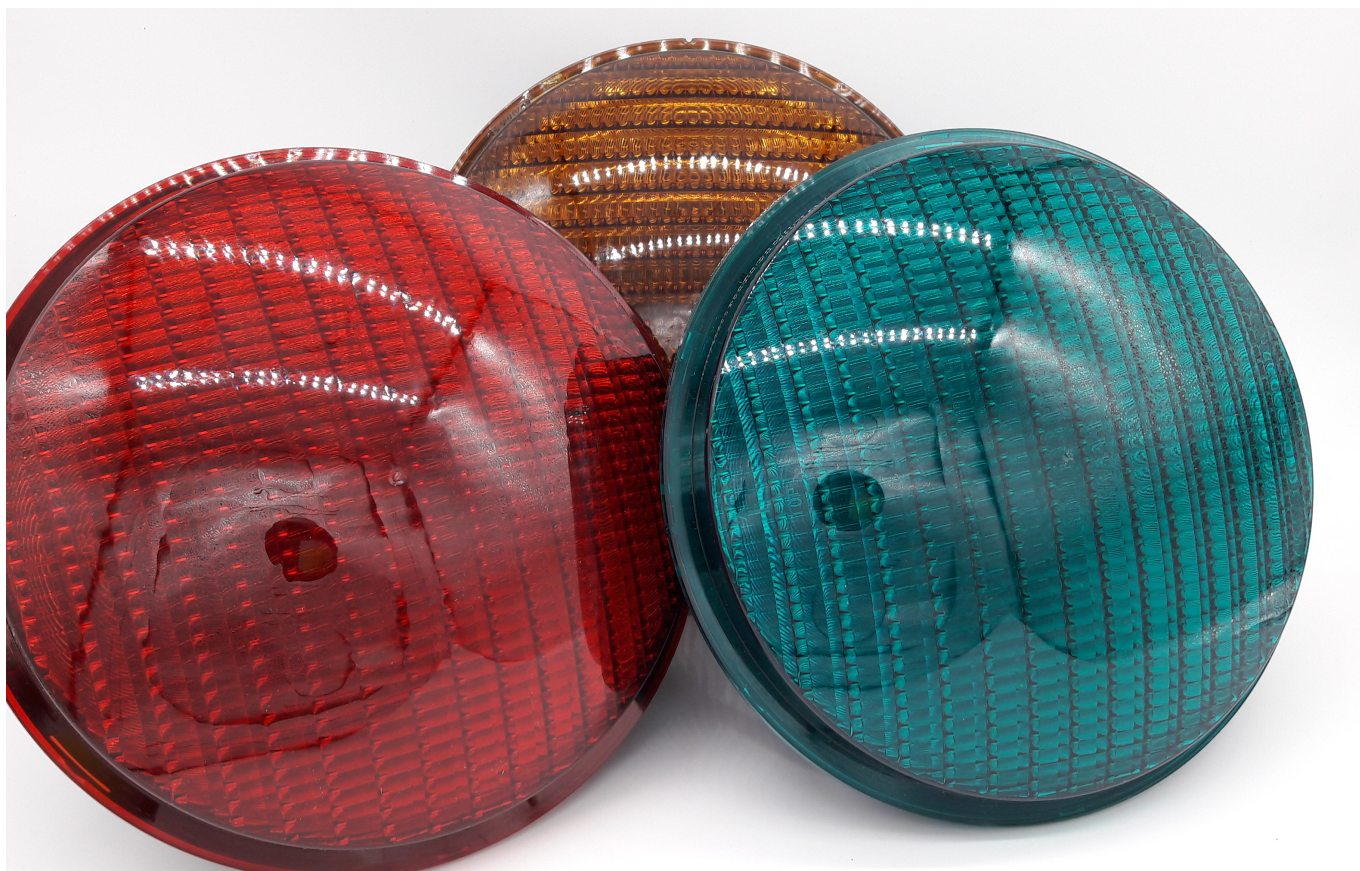

Abmessungen

Feux à LED de haute luminosité avec platine Leds FT3 - Ø300 mm / 230V AC

Spezifikation

Diameter	100 mm	210 mm	300 mm
Luminous intensity acc. to EN12368	Not applicable	red > 200 cd amber > 200 cd green > 200 cd	red > 400 cd amber > 400 cd green > 400 cd

Optical performance acc. to EN12368	Not applicable	A2/1, W A3/1, N
Colour acc. to EN12368	red 613.5 - 631 nm, amber 585 - 597 nm, green 498.5-508 nm, white 5000 - 7000 K	
Uniformity of Luminance acc. to EN12368	Not applicable	better than 1 : 2.5
LED type	High Flux	
Phantom light class acc. to EN12368	Not applicable	Class 5
Power Factor	> 0,9	

Operating Voltage optional: dimmed mode	196 - 253 V / n.a.	196 - 253 V / 150 V - 170 V (light output is reduced to app. 50 % of normal level if the input voltage is decreased)
Frequency	45 - 55 Hz	
Power consumption: typically bright mode / dimmed mode	red, amber, green, white 5 W / n.a.	red, amber, green, white 12 W / 4 W red, amber, green, white 8 W / n.a.
EMC	acc. EN 50293	
Cable	2 x 0.75 mm ² ; 1 m	
Ambient temperature range acc. to EN12368	Class A, B, C (-40°C to +60°C)	
Protection class	Safety Class II acc. to EN 61140	
Tightness	IP 65 acc. to EN 60529	

Impact resistance	Class IR3; acc. to EN 60598-1
Dimensions (incl. front lens)	Ø 108 x 72 mm Ø 210 x 117 mm Ø 300 x 149 mm

Material und Gewicht

Material of lens / housing	UV-stabilized polycarbonate
Weight	< 0.25 kg < 1.0 kg < 1.5 kg

Material und Gewicht

Funktion

Spezifikation

Bemerkungen

Zusammenfassung

Platine Ø300 mm - Alim. 230V/AC

Couleur: Rouge