


**820002**

**CANTILEVER, SH=1400, OOR**

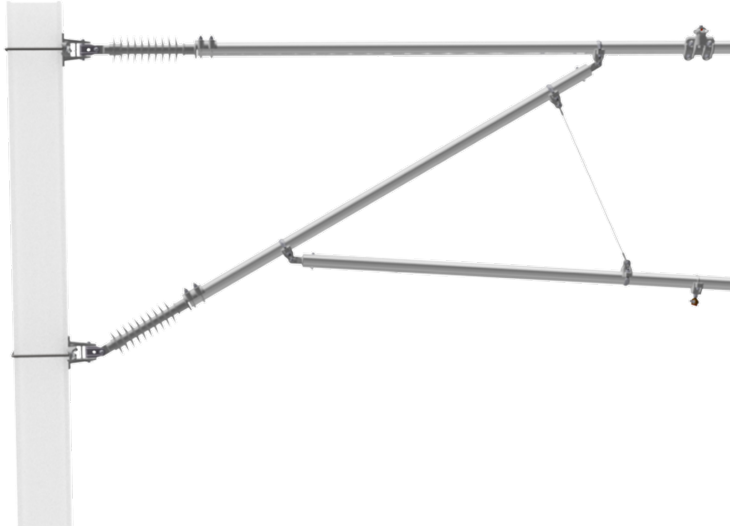

**DIMENSIONS**

System height = 1400 mm

Cantilever length = 3100 mm

Steady arm length = 1100 mm

Pipe diameter = 70/7 mm

**MATERIAL AND WEIGHT**

Pipes: aluminium

Fittings: cast aluminium

Connectors: stainless steel

Steady arm: stainless steel

Mast bracket: hot-dip galvanised steel

Insulator: GFRP/silicone

Weight: ~55 kg

**APPLICABLE STANDARDS**

EN50119

EN50163

**SPECIFICATIONS**

Mast type: HEA260 or HEB260

Insulator creepage distance = 1230±3 mm

Contact wire = copper 107 or 120 mm<sup>2</sup>

Messenger wire = bronze 70 mm<sup>2</sup>

Highest continuous voltage = 27.5 kV AC

**PART LIST**

820002 01

Kummler+Matter AG  
Hohlstrasse 188  
Postfach  
CH-8004 Zürich

Telefon +41 44 247 47 47  
Telefax +41 44 247 47 77  
kuma@kuma.ch  
www.kuma.ch

