820013

CANTILEVER TUNNEL, SH=650, PULL

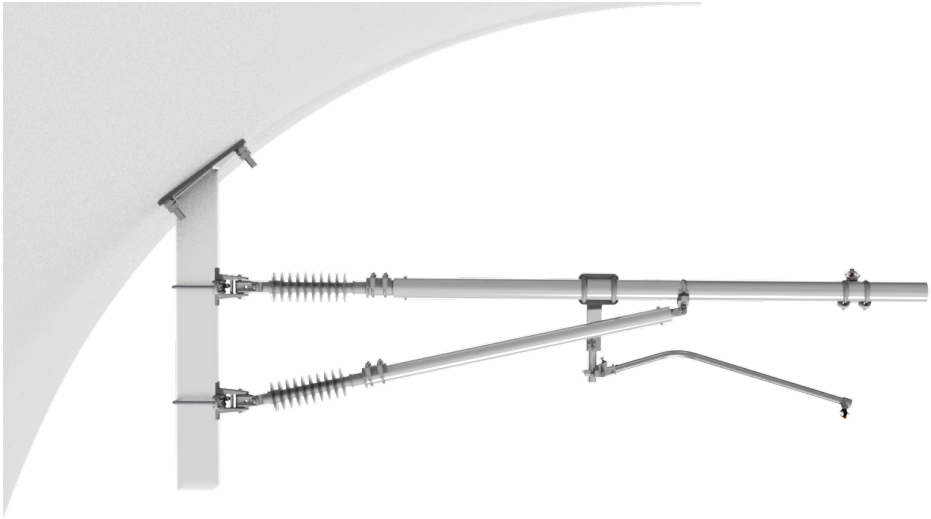

DIMENSIONS
System height = 650 mm
Cantilever length = 2400 mm
Steady arm length = 1100 mm
Pipe diameter = 88.9/5 mm

MATERIAL AND WEIGHT
Pipe: hot-dip galvanised steel
Fittings: cast aluminium
Connectors: stainless steel
Steady arm: stainless steel
Mast bracket: hot-dip galvanised steel
Insulator: GFRP/silicone
Weight: ~53 kg

APPLICABLE STANDARDS
EN50119
EN50163

SPECIFICATIONS
Mast type: Square pipe 140/140/6
Insulator creepage distance = 1241 mm
Contact wire = copper 107 or 120 mm²
Messenger wire = bronze 70 mm²
Highest continuous voltage = 27.5 kV AC

PART LIST

Kummler+Matter AG
Hohlstrasse 188
Postfach
CH-8004 Zürich

Telefon +41 44 247 47 47
Telefax +41 44 247 47 77
kuma@kuma.ch
www.kuma.ch